


NOTES:

1. ALL MANHOLE FRAMES AND COVERS ARE TO BE SET FLUSH WITH BINDER COURSE. A MANHOLE RISER RING SHALL BE USED TO BRING MANHOLE COVER TO FINISHED GRADE PRIOR TO THE COMPLETION OF THE FINAL SURFACE COURSE.
2. OTHER STRUCTURES LEFT ABOVE FINISHED GRADE FOR THE WINTER MUST BE PROPERLY SHIMMED FOR PLOWING AS SHOWN IN THIS DETAIL.



SCALE : NONE
DRAWN BY: SR
CHECKED BY: SMB
APPROVED BY: DAP
LAST REVISED: 9/2/2008

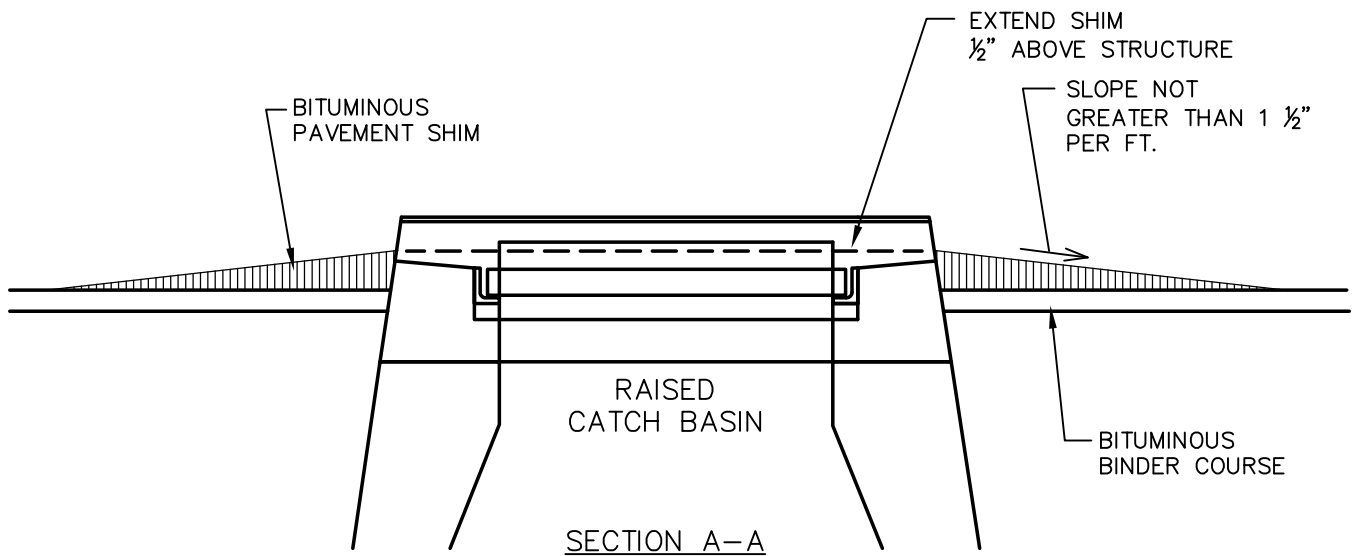

TOWN OF GLASTONBURY
DEPARTMENT OF PHYSICAL SERVICES
ENGINEERING DIVISION

TEMPORARY
PAVEMENT SHIMS
FOR RAISED STRUCTURES

PLATE NO. 4